

# Non Armoured Cable Gland Exd IIC/Exe II/ExtD A21

## OSNJ-A2F Type

### FLAMEPROOF & INCREASED SAFETY

#### APPLICATION

For use with Non armoured cable in hazardous area. Single compression for outer jacket of cable.

#### PROTECTION:

Exd IIC/Exe II/ExtD A21, IP67

Suitable for use in Zone1, 2, 21 and 22.


#### CERTIFICATION:

IECEX, Atex Nemko, GOST R

#### MATERIAL:

Brass with Nickle plated

For Stainless Steel add /SS to part number

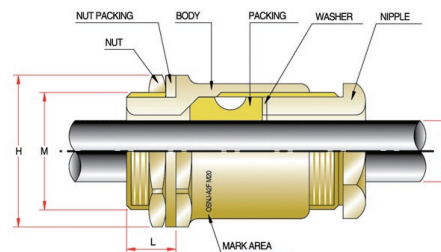

Part No.	Entry Thread Size	Cable Outer Diameter	Thread Length	Entry Hole Size	Hexagon Dimensions 'H'	Shroud Size
OSNJA2F-16AM16	M16	3 - 7.5	15	17	H24 X 26	OSSH-16(B)
OSNJA2F-16BM16	M16	6.1 - 10	15	17	H24 X 26	OSSH-16(B)
OSNJA2F-16AM20	M20	3 - 7.5	15	17	H24 X 26	OSSH-16(B)
OSNJA2F-16BM20	M20	6.1 - 10	15	17	H24 X 26	OSSH-16(B)
OSNJA2F-20AM20	M20	10.1 - 13	15	21	H27 X 29	OSSH-20(B)
OSNJA2F-20BM20	M20	13.1 - 15	15	21	H27 X 29	OSSH-20(B)
OSNJA2F-25A	M25	14 - 17.5	15	26	H32 X 34	OSSH-25(B)
OSNJA2F-25B	M25	16.1 - 19.5	15	26	H32 X 34	OSSH-25(B)
OSNJA2F-32A	M32	18.1 - 22	15	33	H39 X 41.5	OSSH-32(B)
OSNJA2F-32B	M32	21 - 26	15	33	H39 X 41.5	OSSH-32(B)
OSNJA2F-40A	M40	24 - 28	15	41	H48 X 51	OSSH-40(B)
OSNJA2F-40B	M40	27 - 32	15	41	H48 X 51	OSSH-40(B)
OSNJA2F-50A	M50	32.1 - 34	15	51	H58 X 62	OSSH-50(B)
OSNJA2F-50B	M50	34.1 - 40	15	51	H58 X 62	OSSH-50(B)
OSNJA2F-63A	M63	38 - 44	15	64	H73 X 78	OSSH-63(B)
OSNJA2F-63B	M63	43 - 50	15	64	H73 X 78	OSSH-63(B)
OSNJA2F-63C	M63	49 - 54	15	64	H73 X 78	OSSH-63(B)
OSNJA2F-75A	M75	52 - 56	20	76	H85 X 90	OSSH-75(B)
OSNJA2F-75B	M75	55 - 60	20	76	H85 X 90	OSSH-75(B)
OSNJA2F-75C	M75	59 - 62	20	76	H85 X 90	OSSH-75(B)
OSNJA2F-75D	M75	62.1 - 66	20	76	H85 X 90	OSSH-75(B)
OSNJA2F-90A	M90	63 - 70	20	91	H103 X 113	OSSH-90(B)
OSNJA2F-90B	M90	68 - 76	20	91	H103 X 113	OSSH-90(B)
OSNJA2F-100A	M100	76.1 - 81	20	101	H112 X 120	OSSH-100(B)
OSNJA2F-100B	M100	81.1 - 85	20	101	H112 X 120	OSSH-100(B)

NPT threads available upon request