

Metal Non Armoured Cable Gland

OSNJ Type

APPLICATION

Outdoor & Indoor. Industrial cable gland for use with non armoured cables.

PROTECTION: IP67


REGULATION:

According to BS, IEC

MATERIAL:

Brass with Nickle Plated

For Stainless Steel add /SS to part number

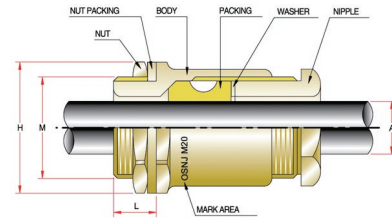

Part No.	Entry Thread Size	Cable Outer Diameter	Thread Length	Entry Hole Size	Hexagon Dimensions 'H'	Shroud Size
OSNJ-16AM16	M16	3 - 7.5	15	17	H24 X 26	OSSH-16(B)
OSNJ-16BM16	M16	6.1 - 10	15	17	H24 X 26	OSSH-16(B)
OSNJ-16AM20	M20	3 - 7.5	15	17	H24 X 26	OSSH-16(B)
OSNJ-16BM20	M20	6.1 - 10	15	17	H24 X 26	OSSH-16(B)
OSNJ-20AM20	M20	10.1 - 13	15	21	H27 X 29	OSSH-20(B)
OSNJ-20BM20	M20	13.1 - 15	15	21	H27 X 29	OSSH-20(B)
OSNJ-25A	M25	14 - 17.5	15	26	H32 X 34	OSSH-25(B)
OSNJ-25B	M25	16.1 - 19.5	15	26	H32 X 34	OSSH-25(B)
OSNJ-32A	M32	18.1 - 22	15	33	H39 X 41.5	OSSH-32(B)
OSNJ-32B	M32	21 - 26	15	33	H39 X 41.5	OSSH-32(B)
OSNJ-40A	M40	24 - 28	15	41	H48 X 51	OSSH-40(B)
OSNJ-40B	M40	27 - 32	15	41	H48 X 51	OSSH-40(B)
OSNJ-50A	M50	32.1 - 34	15	51	H58 X 62	OSSH-50(B)
OSNJ-50B	M50	34.1 - 40	15	51	H58 X 62	OSSH-50(B)
OSNJ-63A	M63	38 - 44	15	64	H73 X 78	OSSH-63(B)
OSNJ-63B	M63	43 - 50	15	64	H73 X 78	OSSH-63(B)
OSNJ-63C	M63	49 - 54	15	64	H73 X 78	OSSH-63(B)
OSNJ-75A	M75	52 - 56	20	76	H85 X 90	OSSH-75(B)
OSNJ-75B	M75	55 - 60	20	76	H85 X 90	OSSH-75(B)
OSNJ-75C	M75	59 - 62	20	76	H85 X 90	OSSH-75(B)
OSNJ-75D	M75	62.1 - 66	20	76	H85 X 90	OSSH-75(B)
OSNJ-90A	M90	63 - 70	20	91	H103 X 113	OSSH-90(B)
OSNJ-90B	M90	68 - 76	20	91	H103 X 113	OSSH-90(B)
OSNJ-100A	M100	76.1 - 81	20	101	H112 X 120	OSSH-100(B)
OSNJ-100B	M100	81.1 - 85	20	101	H112 X 120	OSSH-100(B)

NPT threads available upon request