

Armoured Cable Gland

OSNJ-CW Type

APPLICATION

Outdoor & Indoor.

For use with steel wire armoured cable.

Single compression for outer jacket of cable.

REGULATION:


According to BS, IEC

PROTECTION: IP66

MATERIAL:

Brass with Nickle plated

For Stainless Steel add /SS to part number

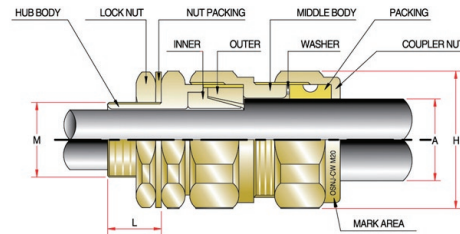

Part No.	Entry Thread Size	Cable Outer Diameter	Thread Length	Entry Hole Size	Armour Range	Hexagon Dimensions 'H'
OSNJ-CW-16AM16	M16	8 - 13	15	17	0.9/1.25	H25 X 27
OSNJ-CW-16BM16	M16	12 - 15.1	15	17	0.9/1.25	H25 X 27
OSNJ-CW-16AM20	M20	8 - 13	15	17	0.9/1.25	H25 X 27
OSNJ-CW-16BM20	M20	12 - 15.1	15	17	0.9/1.25	H25 X 27
OSNJ-CW-20AM20	M20	13 - 17.6	15	21	0.9/1.25	H31 X 33
OSNJ-CW-20BM20	M20	16 - 19.6	15	21	0.9/1.25	H31 X 33
OSNJ-CW-25A	M25	17.5 - 22	15	26	1.25/1.6	H36 X 39
OSNJ-CW-25B	M25	21 - 26	15	26	1.25/1.6	H36 X 39
OSNJ-CW-32A	M32	22 - 28	15	33	1.6/2.0	H45 X 49
OSNJ-CW-32B	M32	27 - 32	15	33	1.6/2.0	H45 X 49
OSNJ-CW-40A	M40	30 - 35	15	41	1.6/2.0	H55 X 59
OSNJ-CW-40B	M40	35.1 - 40	15	41	1.6/2.0	H55 X 59
OSNJ-CW-50A	M50	38 - 45	15	51	1.8/2.5	H68 X 73
OSNJ-CW-50B	M50	43 - 50	15	51	1.8/2.5	H68 X 73
OSNJ-CW-63A	M63	48 - 53	15	64	1.8/2.5	H82 X 88
OSNJ-CW-63B	M63	51 - 56	15	64	1.8/2.5	H82 X 88
OSNJ-CW-63C	M63	55 - 60	15	64	1.8/2.5	H82 X 88
OSNJ-CW-75A	M75	56 - 62	15	76	1.8/2.5	H98 X 106
OSNJ-CW-75B	M75	62.1 - 66	15	76	1.8/2.5	H98 X 106
OSNJ-CW-75C	M75	66.1 - 70	15	76	1.8/2.5	H98 X 106
OSNJ-CW-75D	M75	68 - 75	15	76	1.8/2.5	H98 X 106
OSNJ-CW-90A	M90	74 - 83	20	91	1.8/3.0	H110 X 120
OSNJ-CW-90B	M90	82 - 90	20	91	1.8/3.0	H110 X 120
OSNJ-CW-100A	M100	89 - 94	20	101	1.8/3.0	H120 X 130
OSNJ-CW-100B	M100	93 - 98	20	101	1.8/3.0	H120 X 130

NPT threads available upon request