

# Metal PG Thread Cable Gland


OSPG Type  
DIN Standard

## APPLICATION

Cable Glands according to  
DIN Standard

## MATERIAL:

Brass with Nickle Plated

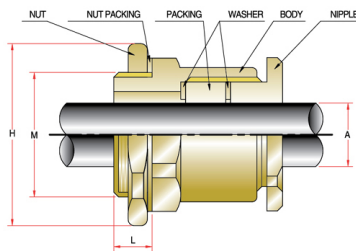

Part No.	Entry Thread Size	Cable Outer Diameter	Thread Length		Hexagon Dimensions 'H'	Length 'L'
			Metric	PG		
OSPG-9	PG9	.7 - 8.	15	7	H19 X 22	20
OSPG-11	PG11	.9 - 11.	15	7	H23 X 27	21
OSPG-13.5	PG13.5	.9 - 11.	15	7	H24 X 28	22
OSPG-16	PG16	.12 - 14.	15	7	H26 X 30	24
OSPG-21	PG21	15 - 17	15	8	H31 X 35	25
OSPG-29	PG29	19 - 23	15	8	H42 X 46	26
OSPG-36	PG36	25 - 31	15	9	H52 X 58	30
OSPG-42	PG42	33 - 37	15	10	H60 X 65	36
OSPG-48	PG48	39 - 43	20	10	H66 X 71	37

# Shrouds

OSSH Type  
DIN Standard

## APPLICATION

For fitting over cable glands  
Glands  
in inside or outside applications

## MATERIAL:

EPDM CR70

## MATERIAL:

For Armoured Cable Glands

OSSH-16(A)  
OSSH-20(A)  
OSSH-25(A)  
OSSH-32(A)  
OSSH-40(A)  
OSSH-50(A)  
OSSH-63(A)  
OSSH-75(A)



For Non-Armoured Cable

OSSH-16(A)  
OSSH-20(A)  
OSSH-25(A)  
OSSH-32(A)  
OSSH-40(A)  
OSSH-50(A)  
OSSH-63(A)  
OSSH-75(A)

