

Stopping Plug Exd IIC/Exe II/ExtD A21

OSSP-R & OSSP-H Type

FLAMEPROOF & INCREASED SAFETY

APPLICATION:

To close unused cable gland entries and maintain the flameproof and increased safety integrity of the equipment

PROTECTION:



Exd IIC/Exe II/ExtD A21, IP66/67
Suitable for use in Zone1, 2, 21 and 22.

CERTIFICATION:

IECEX, ATEX Nemko, GOST R

MATERIAL:

Brass with Nickle Plated
For Stainless Steel add /SS to part number

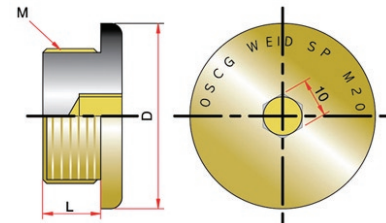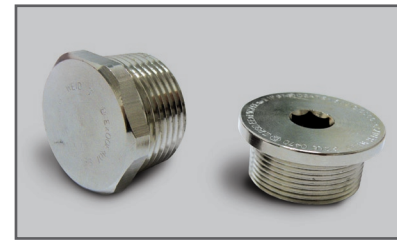

Stopping Plug Metric Part Number	Thread Size	Thread Length	Diameter
OSSP-R101/M16	M16	15	26
OSSP-R102/M20	M20	15	29
OSSP-R103/M25	M25	15	33
OSSP-R104/M32	M32	15	41
OSSP-R105/M40	M40	15	49
OSSP-R106/M50	M50	15	60
OSSP-R107/M63	M63	15	76
OSSP-R108/M75	M75	15	88
OSSP-R109/M90	M90	20	105
OSSP-R110/M100	M100	20	116

Stopping Plug PG Part Number	Thread Size	Thread Length	Diameter
OSSP-R101/PG7	PG7	6	18
OSSP-R101/PG9	PG9	7	22
OSSP-R101/PG11	PG11	7	27
OSSP-R102/PG13.5	PG13.5	7	28
OSSP-R103/PG16	PG16	7	30
OSSP-R104/PG21	PG21	8	35
OSSP-R105/PG29	PG29	8	46
OSSP-R106/PG36	PG36	9	58
OSSP-R107/PG42	PG42	10	65
OSSP-R108/PG48	PG48	10	71

Stopping Plug NPT Part Number	Thread Size	Thread Length	Diameter
OSSP-R102/NPT1/2	1/2"NPT	15	29
OSSP-R103/NPT3/4	3/4"NPT	16	33
OSSP-R104/NPT1	1"NPT	18	41
OSSP-R105/NPT1 1/4	1 1/4"NPT	19	49
OSSP-R106/NPT1 1/2	1 1/2"NPT	21	60
OSSP-R107/NPT2	2"NPT	24	76
OSSP-R108/NPT2 1/2	2 1/2"NPT	27	88
OSSP-R109/NPT3	3"NPT	30	105
OSSP-R109/NPT3 1/2	3 1/2"NPT	32	116

Hexagonal Head replace R with H to part number