

Elbow Exd IIC/Exe II/ExtD A21

OSAE Types

APPLICATION

For application in installation areas with small amounts of space. Lock nut in any position.

PROTECTION:

Exd IIC/Exe II/ExtD A21, IP67

Suitable for use in Zone1, 2, 21 and 22.


CERTIFICATION:

IECEx

MATERIAL:

Brass with Nickle plated

For Stainless Steel add /SS to part number

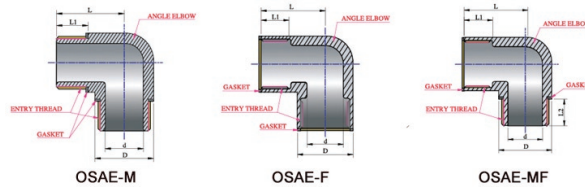

Round Type/ Size	Entry Thread Size [M]		D	d	S	L1			L2	L
	Metric	NPT				OSAE-M	OSAE-F	OSAE-MF		
OSAE-16	M16	1/2"	24	10.3	32	15	20	20	15	43
OSAE-20	M20	1/2"	27	15.2	34.5	16	20	20	16	43
OSAE-25	M25	3/4"	32	19.8	37	16	20	20	16	50
OSAE-32	M32	1"	39	26	43	18	20	20	18	62
OSAE-40	M40	1 1/4"	48	33	50	19	20	20	19	73
OSAE-50	M50	1 1/2"	58	43	57	21	25	25	21	85
OSAE-63	M63	2"	73	55	70	24	25	25	24	107
OSAE-75	M75	2 1/2"	85	68	76	24	25	25	24	118

Ordering Code Examples

OSAE-M20(F)XM20(F)	M20 Female to M20 Female
OSAE-M20(M)XM20(F)	M20 Male to M20 Female
OSAE-M20(M)XM20(M)	M20 Male to M20 Male
OSAE-M20(M)XNPT1/2(F)	M20 Male to NPT 1/2" Female
OSAE-NPT1/2(M)XM20(F)	NPT 1/2" Male to M20 Female
OSAE-NPT1/2(M)XNPT1/2(M)	NPT 1/2" Male to NPT 1/2" Male

Phone for all other ordering code combinations as listed in above table